

Congratulations on your choice of a Polaris Bluetooth® controller by MB Quart. This “Quick Start” installation guide is meant to help you complete a basic installation. For more detailed information, visit our website at MBQuart.com and go to the TEQ support section or the Frequently asked questions.



CAUTION

Always consider consulting a professional audio installer before installing any audio components. Be careful and take your time. Do not let wires make contact with metal edges or hot engine components.

Switch Mounting

MOUNTING

The controller is designed to mount in a standard rocker switch opening for accessories. Do not attempt to remove the unit from the switch housing. The housing is an integral part of the unit.

The unit itself requires a 0.83 inch (21mm) wide by 1.4 inch (37mm) high opening with at least 2.5 inches of clearance behind the mounting surface. Before drilling any holes make sure there are no obstructions behind the mounting surface.


Keep enough space around the controller, if possible, to accommodate the operator’s fingers.

RUBBER GASKET

Make sure the included rubber gasket remains in place during installation. This gasket aides in keeping the unit water resistant.

AUX INPUT – 3.5MM JACK

The 3.5mm input jack is located on the bottom of the unit. Remember to re-insert the water resistant rubber plug when not using the input. The control unit should always be mounted with the 3.5mm jack on the bottom.

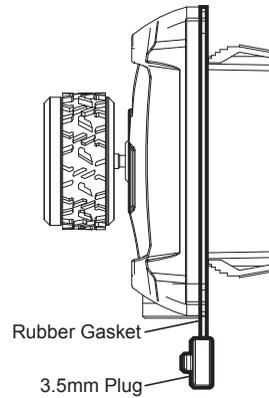

Multi-Function Joystick Operation

The multi-function joystick has multiple operations for various features. Take a minute to familiarize yourself with all of the functions to better and more quickly navigate your new Bluetooth controller.

VOLUME

Slowly turn the controller clockwise to increase volume and counter clockwise to decrease volume. Turning the dial quickly does not increase the speed of volume increase or decrease. Under AUX mode the volume will be controlled by your device.

POWER ON/OFF

A. Press and hold control volume for 3 seconds to power the unit on/off

3.5MM SIGNAL INPUT

A. the controller will automatically switch from Bluetooth to the AUX input by plugging your device into the 3.5mm input.


BLUETOOTH CONTROL

RIGHT/DOWN TOGGLE

A. Toggle right or down to advance to the next track

LEFT/UP TOGGLE

A. Toggle left or down to back up to previous track

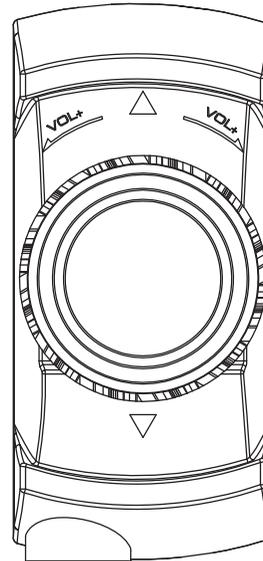


Wiring

The wiring and connections should be secure and away from any moving parts or extremely hot surfaces.

The two(2) JST signal output connectors can be connected directly to two(2) amplifiers <!-- Generator: Adobe Illustrator 18.1.1, SVG Export Plug-In -->

<svg version="1.1" >

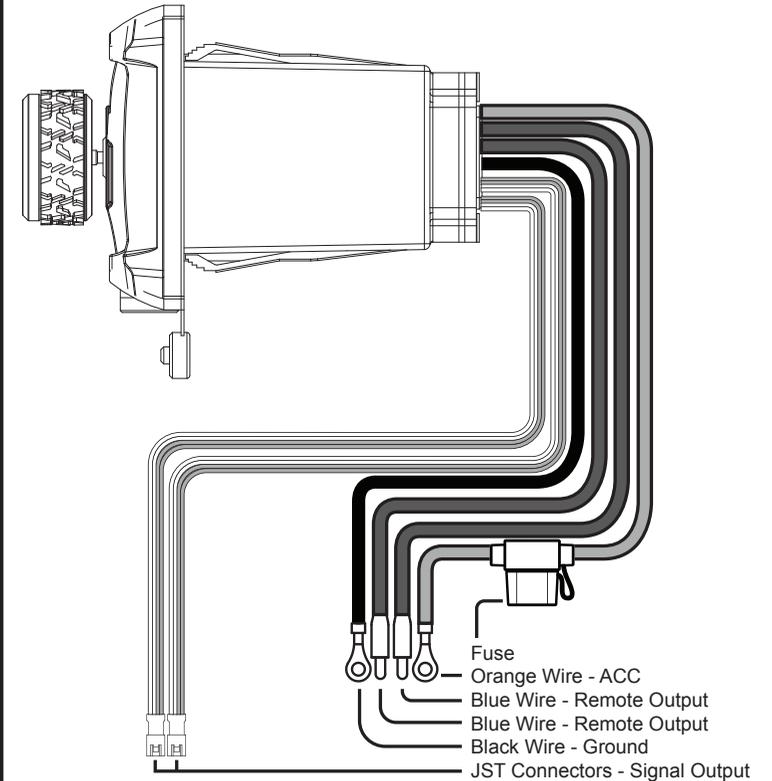

Bluetooth® Device Pairing

The pairing process can vary based on your particular device. Refer to the operating instructions of your device. Below is the general process to connect the controller.

The Bluetooth® Controller will flash slowly when “searching” for the last paired device.


If no device is located, it will flash quickly indicating it is ready to pair to a new device. On your Bluetooth enabled device, search for POLARIS under Bluetooth settings.

Select POLARIS; wait for the device to indicate “connected”. The status indicator will change to solid red. Music will now play through the system.

POLARIS®

ENGINEERED PARTS
ACCESSORIES & APPAREL

Quick Start Installation Guide

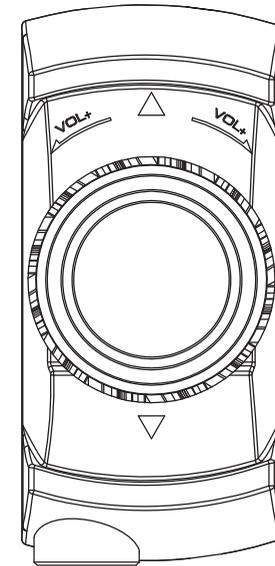

MBQuart.com
#MUSICDEFINED

MBQUART®
MUSIC. DEFINED.

Bluetooth® Controller

The Bluetooth™ word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by MB Quart is under license