

Assembly Instructions

Model:	Jeep JL (Wrangler) & JT (Gladiator)
Description:	Top Dash Speaker Install
Part Number:	JC1-108
Assembly Time:	30 Min

Before you begin, read through these instructions and check that all parts are present. Please note that MB Quart cannot assume any responsibility for damage resulting from incorrect installation.

Parts List		
No.	Component Name	Qty
1	3.5in Coaxial Speakers	2


Tools Required	
1	Bojo or Panel Tool
2	Philips Screwdriver
3	8, 10, 13mm Socket
4	Ratchet

Top Dash Speaker

- Unclip and remove dash grill



- Remove (2) Phillips screws, disconnect wiring and remove speaker from vehicle

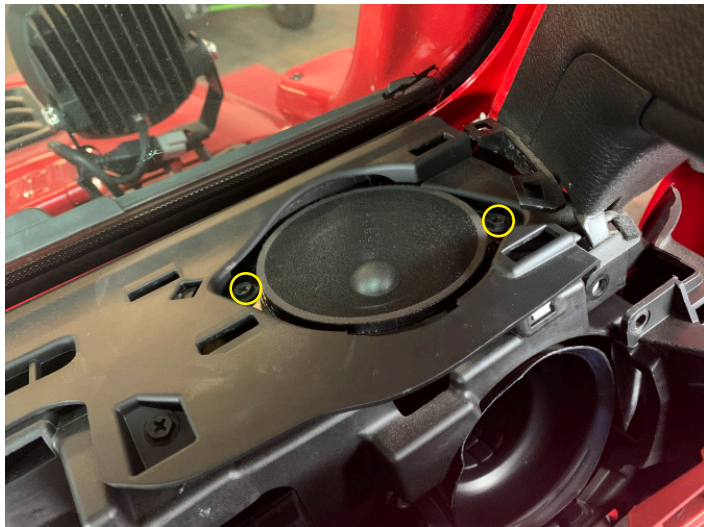

- Connect the factory wires to the speaker



Top Dash Speaker Install

- Install speaker with (2) Phillips screws



- Clip top dash grill into place



FCC Notification

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a mobile installation. This equipment generates uses and can radiate radio frequency energy. If not installed and used in accordance with the instructions, this equipment may cause harmful interference to radio communications. There is no guarantee that interference will not occur in a particular installation.

WARNING: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment complied with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the radiator and your body.